Generation Membrane Pump



18 kW | 60 000 Btu

PUMP*KIN*®20

Super Silent Mini-Condensate Pump

18 l/h
4,7 gal/h

10 m
32,8 ft

23 db(A) DIN EN 3745
~ < 16 db(A) DIN EN 3744

Description

The PUMP*KIN*®20 consists of a pump unit and a 3-level float switch that controls the pump (switching it on and off). The transparent float unit is connected directly to the outlet pipe of the A/C unit drip tray or to the condensate outlet line. The supplied package includes the pump, the 3-level float switch and mounting accessories, i.e. double-sided padded tape for attaching the float switch and an anti-vibration pad.


Usage

The PUMP*KIN*®20 is the ideal choice for use in split wall air conditioning systems. With its extremely slim design and low noise level, it is the perfect fit for air conditioners with limited space.

Special features

- extremely quiet
- 3-stage float control
- integrated alarm control
- ultra-slim design
- affordable
- reliable

Installation options

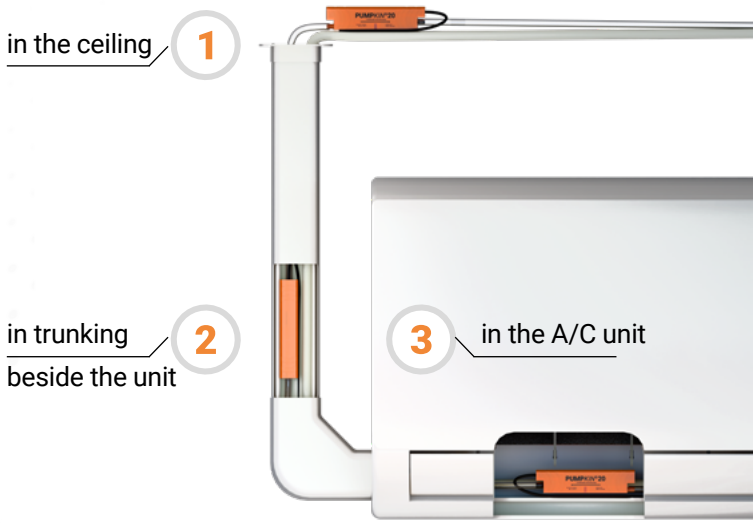

Inside the box

- Pump block
- 3-stage float switch with dirt retainer
- 1× mounting bracket
- PVC vent hose
- 2x double sided padded tape
- Silicon hose (internal diameter 15 mm, length 40mm - connects to split drain hose)
- Mounting kit (2x screws and 2x plugs)



Technical data

For air conditioners up to [kW]	18
Drive	Membrane pump
Mains voltage & frequency	100-240V, 50/60Hz
Power consumption [W]	Operation: 4 | Standby: 1,5
Max. flow rate [l/h]	18
Max. delivery height [m]	10
Max. suction height [m]	1,5
Pump unit L x W x H [mm]	166 x 30,6 x 39
Float switch L x W x H [mm]	82 x 39 x 39
Switch points float switch [mm]	Alarm: max. 23 Start: 18 ±1 Stop: 14 ±1
Alarm switch	100-240V, 5A (ohmic load) NO normally open NC normally closed
Pressure, suction hose [mm]	6 x 1,5

Installation video:

SCAN ME

All indicated data serves only the product description and are not as characteristically understood in the legal sense. All data and specifications are subject to change.