

SANICONDENS® Pro

SANICONDENS® Pro pumps condensate away from condensing boilers and air conditioners. Small, this powerful pumping unit can be floor or wall mounted.


SANICONDENS® Pro comes with an auxiliary external overflow switch that will shut down the appliance or alert the consumer in the event of pump overflow.

NEW

4,5 m
50 m



Vertical and Horizontal discharge: ↑ 4,5 m → 50 m

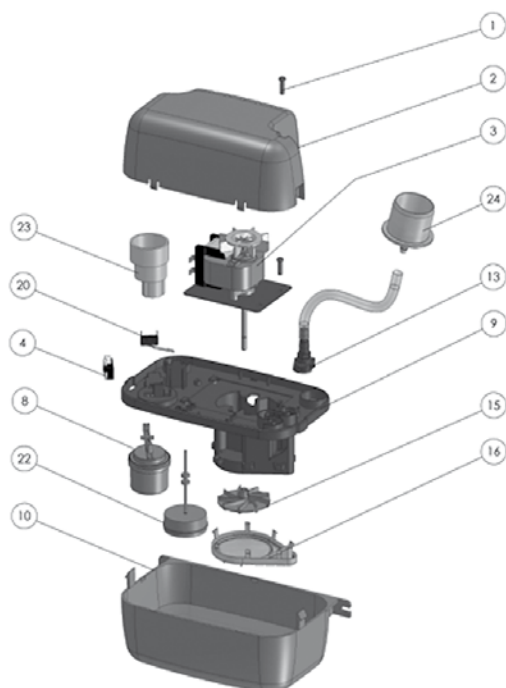

Possible connections: boiler, refrigerated display and air conditioner

Recommended waste pipe diameter: 2 DN 28 mm

Discharge pipe: 8/11 mm

Maximum flow rate: 342 L/h

pH min: 2,5

Tank volume: 2 L

Electrical power supply: 220-240 V / 50 Hz

Motor power rating: 60 W

Maximum current input: 0,52 A

Electrical classification: I

Sound level: < 45 dB(A)

Maximum admissible waste water temperature: 80°C - S3 15 % (1 min 30 on / 8 min 30 off)

Net weight: 2 kg

Index of protection: IP20

Supplied with : wall mount brackets, inlet adapter, discharge adapter (DN 50 mm), 5 m of flexible discharge pipe, 2 m power cord, prewired to an alarm

Benefits

- 2 inputs with one shut-off
- Prewired to an alarm
- 2 L tank
- The volume of the tank saves the pump from starting too frequently
- Compact
- Easy mounting with dual direction (vertical and horizontal) mountings

